


LONDON FOGGERS

Used everywhere in the world
since 1968

MODEL 9-10 High Output ULV Aerosol Generator

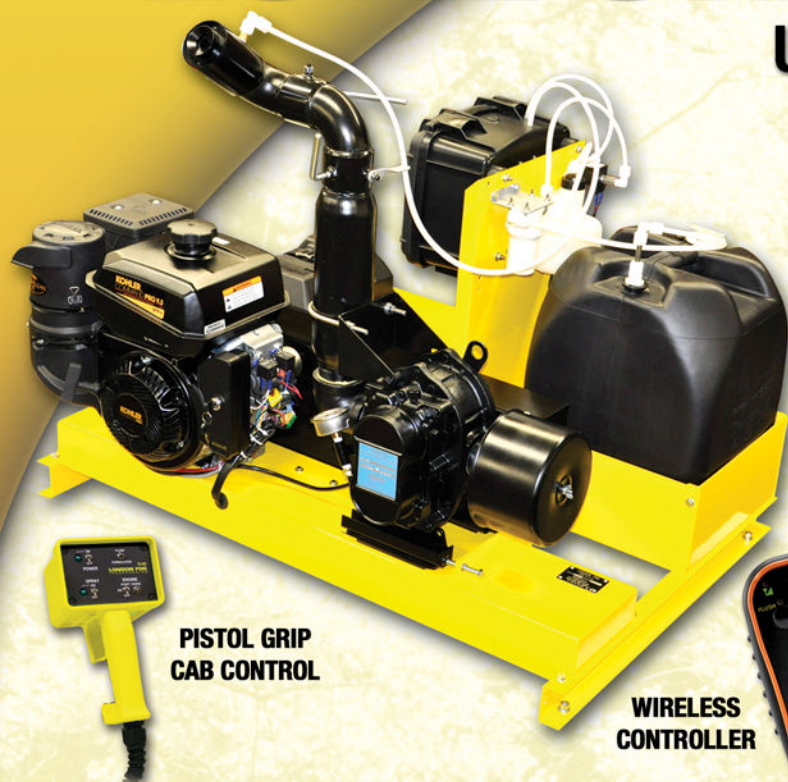

**PISTOL GRIP
CAB CONTROL**

**WIRELESS
CONTROLLER**



**HOOT
NOZZLE**

Standard Features on the 9-10

- Teflon coated aluminum HOOT nozzle
- Pistol grip cab control start - spray - formulation - flush functions
- FMI formulation pump, 3/8" ceramic piston
- Triple V Belt drive
- Kohler single cylinder OHV command engine
- Silencer tube

Optional Features on the 9-10

- 1 or 2 years spares kits
- Tachometers / Hour meter
- GPS, tracking & recording features
- Additional capacity gas tank

The NEW 9-10 ULV sprayer (9HP -10 MPH) built by London Foggers was designed as an update to the XKE machine, and at the request from industry for a more affordable blower machine than London Foggers model 18-20. It has been extensively tested in the field prior to its release and is fully backed by an iron clad warranty. The ability of this machine to share a majority of parts used by our best selling model 18-20 will surely mean this machine will take no getting used to. The reliability of the 18-20 is literally built into this machine from the ground up.

Next to reliability, the number one thing of importance in a sprayer is efficiency, and the 9-10 is second to none. The 9-10 will fully meet label specifications on 90% of mosquito adulticide labels at 10MPH++ as this machine uses a solid aluminum nozzle, with zero moving parts, which is then Teflon coated to increase life. The complex aluminum nozzle design on the 9-10 has shown in independent testing to be far more repeatable, easier to calibrate, and create a better droplet dispersion than ANY OTHER SPRAYER ON THE MARKET. Standard features on the 9-10 pistol grip cab control are a main power switch, engine start switch, and spray / flush tank selector switch.

The 9-10 will fully work with our wireless remote, and our "London Flow" GPS variable flow system, which will plug and play into at least 5 popular off the shelf programs currently in use today. This will allow the 9-10 to fully comply with all NPDES requirements seamlessly, regardless of which technology system is in use at your location.

Specifications

| | |
|-------------------------|---|
| Engine | 9.5 HP overhead valve single cylinder, electric start |
| Formulation Pump | 12 Volt DC adjustable output, positive displacement, 0-20 oz./min |
| Formulation Tank | 15 gallon (56 liters), corrosion resistant |
| Particle Size | 80% of droplets-less than 20 microns |
| Fuel Tank | 1.5 gallon (28.38 litre) with gauge |
| Flush Tank | 1 1/2 quart (1.43 liter) corrosion resistant |
| Blower | Rotary, positive displacement, up to 356 CFM |
| Weight | 355 lbs (202 kg) |
| Length | 37" (94 cm) |
| Width | 46" (117 cm) |
| Height | 39" (99 cm) |

**505 Brimhall Avenue
Long Lake, MN 55356**

P. 952-473-5366

F. 952-473-5302

TF. 800-448-8525

E. salesupport@londonfoggers.com



**Sentinel
GIS**



*Used everywhere
in the world*

www.londonfoggers.com

© Copyright London Foggers All Rights Reserved